


## **Wheel Mounted Scrapers**

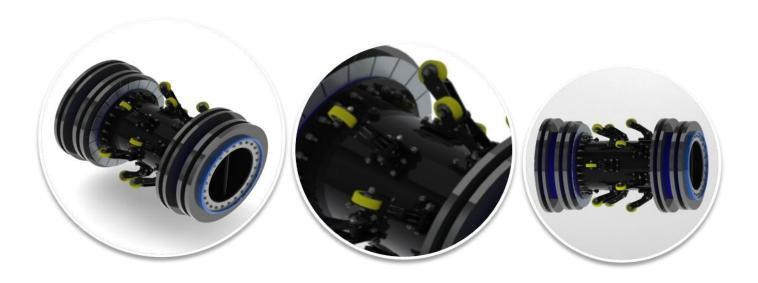

Designed to remove debris and deposits from the pipeline IKS range of wheel-mounted scrapers offers excellent cleaning qualities over long-distance pipelines.

The range for wheel-mounted scrapers is 30" through to 60", for smaller diameters we offer extra support discs.

The standard model is supplied with six polyurethane discs: two support/guide discs that assist loading and centralization in the pipeline, four sealing discs that seal/drive, and suspension wheel units.

All wheel-mounted scrapers are supplied with by-pass ports which allow removed debris to be flushed clear of the discs and brushes.



The scrapers can be supplied with carbon steel wire bristle with a stainless-steel option.

For pipelines with internal coatings, we can offer polypropylene or nylon bristles. Other

design options include the attachment of magnet boxes (for debris collection) and gauge

plates for pipeline proving.

Extra sealing and guide discs can be added if the scraper is to be used over a long

distance (150km) or the pipeline conditions are particularly arduous.

Alternatively, guide discs can be removed (opposite) if the pipelines are short.

All IKS scrapers are supplied with polyurethane bumper noses as standard.

All IKS scrapers are designed to pass minimum 1.5D radius bends and negotiate full bore

branches.

All IKS scrapers multi bolt scraper body assemblies are welded to code standard BS EN

ISO 15614-1:2004+A1:2008.